


# Agilent ESA-E Series Spectrum Analyzer

## Configuration Guide

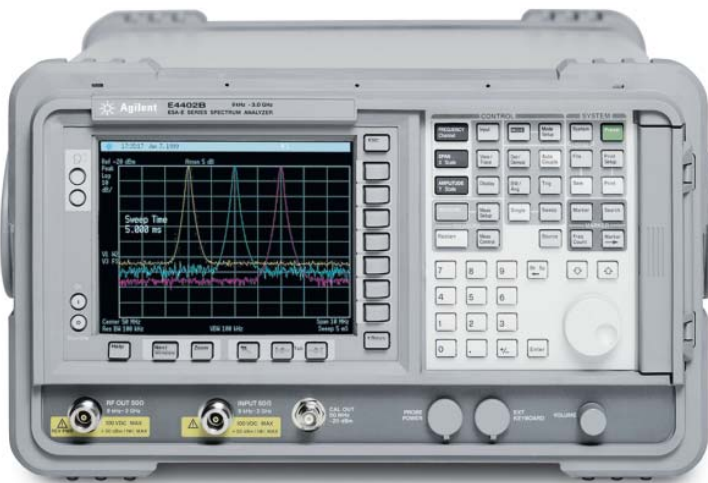

This ESA configuration guide will help you determine which performance options, measurement personalities, accessories, and services to include in your new ESA-E, or to add as upgrades to an existing ESA-E.

Options for the new EXA signal analyzer are shown alongside the ESA to help customers who wish to migrate to the latest technology. Customers looking for increased speed, more application options, or modern connectivity will benefit by moving to the new EXA signal analyzer.

***Tested. Trusted. Reliable.***



**Agilent Technologies**

## Agilent ESA-E Spectrum Analyzer

This step-by-step guide will help you configure your ESA-E. Capabilities that are listed as standard come with the instrument at no additional charge. Tailor the performance, exterior, and service packages to meet your requirements.

The ESA-E spectrum analyzer is available in three express configurations: standard (STD/STG) or communications test (COM). The express analyzers offer faster delivery by limiting the number of options that can be ordered together. The custom configuration allows for maximum flexibility in ordering the analyzer that best meets your needs by offering all of the ESA-E options; however, it increases the delivery timeframe.

For detailed specifications, refer to the ESA-E Spectrum Analyzer specification guide (E4401-90490). For a summary of specifications, refer to the ESA-E data sheet, literature number 5989-9815EN.

### Table of contents:

ESA-E Custom Configuration .....	3
ESA-E Standard Express Spectrum Analyzer (STD/STG) .....	6
ESA-E Communications Test Express Spectrum Analyzer (COM).....	8
Express Analyzer and Bundle Equivalent Options .....	9
ESA-E Accessory, Calibration, and Warranty Options .....	10
ESA-E Upgrade Options .....	11
Related Literature .....	12

## ESA-E Custom Configuration

### Step 1. Select your frequency range

Description	ESA-E model number <sup>1</sup>	EXA option number
Frequency range, 9 kHz to 3.0 GHz	E4402B	N9010A-503 EXA Option 503 maximum frequency range is 3.6 GHz
Frequency range, 9 kHz to 6.7 GHz	E4404B	N9010A-507 EXA Option 507 maximum frequency range is 7.0 GHz
Frequency range, 9 kHz to 13.2 GHz	E4405B	N9010A-513 EXA Option 513 maximum frequency range is 13.6 GHz
Frequency range, 9 kHz to 26.5 GHz	E4407B	N9010A-526

### Step 2. Included options at no additional charge

Description	ESA-E spectrum analyzer	EXA signal analyzer
GPIO connection	Option A4H <sup>2</sup>	Standard on all EXA signal analyzers; in addition, the EXA offers seven USB ports and LAN connectivity as standard.
IntuiLink PC connectivity software	Connects to Microsoft® Word and Excel	The PC-based EXA requires no additional software to connect to Microsoft applications

### Step 3. Choose frequency reference

Description	ESA-E spectrum analyzer	EXA signal analyzer
Frequency reference (standard aging rate)	$\pm 2 \times 10^{-6}$ / year	$\pm 1 \times 10^{-6}$ / year
High-stability frequency reference (reduces frequency drift resulting in more accurate measurements; recommended option)	Option 1D5 Aging rate: $\pm 1 \times 10^{-7}$ / year	N9010A-PFR Aging rate: $\pm 1 \times 10^{-7}$ / year

### Step 4. Choose an attenuator

Description	ESA-E spectrum analyzer	EXA signal analyzer
Mechanical attenuator (standard)	5 dB steps, 0 to 60 dB	10 dB steps, 0 to 60 dB
Fine-step mechanical attenuator	Not available	N9010A-FSA Allows 2 dB steps for the full 60 dB range of the mechanical attenuator
Electronic attenuator up to 3.6 GHz	Not available	N9010A-EA3 Add to the mechanical attenuator; 1 dB steps, 0 to 24 dB

### Step 5. Add a preamplifier

Description	ESA-E spectrum analyzer	EXA signal analyzer
Preamplifier	Option 1DS 1 MHz to 3 GHz	N9010A-P03 100 kHz to 3.6 GHz

1. The E4402B has six available expansion slots for additional hardware options: the E4404/05/07B has five available expansion slots
2. Requires one expansion slot

## ESA-E Custom Configuration – continued

### Step 6. Add extra options<sup>1</sup>

Description	ESA-E spectrum analyzer	EXA signal analyzer
Narrow resolution bandwidths (recommended option)	Option 1DR	Standard
Low-emissions shielding	Option 060 <sup>2</sup>	Not available
Wide-offset phase noise improvement and ACPR dynamic range extension	Option 120 <sup>3</sup>	Similar performance standard
Replace GPIB with serial port	Option 1AX <sup>3,4</sup>	Serial port unavailable; USB is standard
Time-gated spectrum analysis	Options 1D6	Standard
50 $\Omega$ tracking generator	Option 1DN, 9 kHz to 3 GHz	Not available
Fast time domain sweep; IF, sweep, and video output ports	Option AYZ <sup>3</sup>	Fast time domain sweep is standard
External mixing	Option AYZ <sup>5</sup>	Not available
Digital demodulation hardware	Option B7D/B7E <sup>6</sup>	Standard
APC 3.5 mm input connector	Option BAB <sup>5</sup>	Not available
Low frequency extension to 100 Hz	Option UKB <sup>7</sup>	Not available
EMI detectors and FM Demodulation	Option AYQ <sup>3,7</sup>	Most EMC adds quasi-peak deletion and basic FM demodulation

1. If two or more ESA-E options are ordered, memory size may limit the number of options that may be loaded at any one time; for detailed information about memory size limitations, please see the Web site: <http://sa.tm.agilent.com/ESA/memory>
2. Not compatible with Option B7B
3. Requires one expansion slot
4. Not compatible with Option A4H
5. E4407B only
6. Requires Option 1D5; occupies two expansion slots, must be ordered jointly
7. Requires Option 1DR

## ESA-E Custom Configuration – continued

### Step 7. Choose measurement software

Description	ESA-E spectrum analyzer	EXA signal analyzer
AM demodulation	Standard	N9063A
FM demodulation/ deviation	Option BAA <sup>1,2</sup>	N9063A
Phase noise measurement	Option 226 <sup>3</sup>	N9068A
Noise figure measurement	Option 219 <sup>4,2</sup>	N9069A
GSM/GPRS measurement	Option BAH <sup>5,6</sup>	N9071A
Edge upgrade to option BAH	Option 252 <sup>7</sup>	N9071A
Cable fault location measurement	Option 225 <sup>8</sup>	Not available
TV trigger on screen measurement	Option B7B <sup>9</sup>	Not available
Cable TV field service and analog broadcast measurement	Option 227	Not available
Modulation analysis measurement	Option 229 <sup>10</sup>	89601X
Benchlink Web remote software	Option 230 <sup>11</sup>	Remote desktop comes standard with the PC-based EXA
ESA to 89601A VSA software link	Option 231 <sup>12</sup>	Standard
89601A vector signal analysis (VSA) software	89601A – runs on external PC	89601A – runs internal to the instrument
8566/68 programming code compatibility	Option 266 <sup>13</sup>	Not available
8590 series programming code compatibility	Option 290 <sup>13</sup>	Not available
856xE/EC programming code compatibility	Not available	N9061A
Bluetooth® measurement analyzer bundle	Option 304 <sup>14</sup>	Not available
cdmaOne measurement	Option BAC <sup>15</sup>	Not available
cdma2000 measurement	Not available	N9072A
W-CDMA measurement	Not available	N9073A-1FP
HSDPA / HSUPA measurement	Not available	N9073A-2FP
802.16 OFDMA measurement	Not available	N9075A
TD-SCDMA measurement	Not available	N9079A-1FP
HSDPA/8PSK measurement	Not available	N9079A-2FP

### Step 8. Add special options

Description	ESA-E spectrum analyzer	EXA signal analyzer
26.5 GHz uncalibrated built in preamplifier	Option H26 <sup>18</sup>	Not available
70 MHz IF output	Options H70 <sup>2,16</sup>	Not available
FM deviation personality enhancement	Option J36 <sup>17</sup>	Not available

- Not compatible with Option 304 or 106
- Occupies one expansion slot
- If two or more ESA-E options are ordered, memory size may limit the number of options that may be loaded at any one time; for detailed information about memory size limitations, please see the Web site: <http://sa.tm.agilent.com/ESA/memory>
- See *ESA Noise Figure Measurement Personality Technical Overview*, literature number 5989-0215EN, for recommended options
- Requires Option B7D/B7E
- Requires Option 1D5 and 1D6; includes capability of Option 225
- Requires Option BAH
- Requires Option 1DN; not compatible with Option BAH; recommended accessory Option B7K
- Requires BAA; not compatible with Option 060
- Requires Options B7D/B7E, A4H, and 1D5; includes capability of Option 231
- Requires Option A4H
- Requires Options B7D/B7E, A4H, and 1D5
- Free download on the Web, no license required: <http://www.agilent.com/find/esa>
- Includes Options 228, 106, B7D/B7E, 1DS, and 1D5; occupies three expansion slots
- Requires Options B7D/B7E and 1D5
- Recommended for use with 89601A VSA software
- Requires Option BAA
- Available at time of purchase only. Not upgradable.

## ESA-E Standard Express Spectrum Analyzer (STD/STG)

The ESA-E express analyzers offer configurations that are typically ordered together to help speed instrument delivery. The EXA signal analyzer is not offered in an express configuration, however, the newer technology allows for faster delivery times, regardless of the configuration. If you wish to order an EXA configuration equivalent to the ESA-E express analyzer, please select the individual EXA options shown in the table below.

### Step 1. Select your frequency range

Description	ESA-E model number <sup>1</sup>	EXA option number
Frequency range, 9 kHz to 3.0 GHz	<b>E4402B</b> E4402B-STD or E4402B-STG (adds tracking generator)	N9010A-503 EXA Option 503 maximum frequency is 3.6 GHz
Frequency range, 9 kHz to 6.7 GHz	<b>E4404B</b> E4404B-STD or E4404B-STG (adds tracking generator)	N9010A-507 EXA Option 507 maximum frequency range is 7.0 GHz
Frequency range, 9 kHz to 13.2 GHz	<b>E4405B</b> E4405B-STD or E4405B-STG (adds tracking generator)	N9010A-513 EXA Option 513 maximum frequency range is 13.6 GHz
Frequency range, 9 kHz to 26.5 GHz	<b>E4407B</b> E4407B-STD or E4407B-STG (adds tracking generator)	N9010A-526

### Step 2. Included ESA-E options at no additional charge

Description	ESA-E spectrum analyzer	EXA signal analyzer
GPIB connection	Option A4H <sup>2</sup>	Standard on all EXA signal analyzers; in addition, the EXA offers seven USB ports and LAN connectivity standard
FM demodulation/deviation	Option BAA <sup>2,3</sup>	N9063A
Fast time domain sweep; IF, sweep, and video output ports	Option AYW <sup>2</sup>	Fast time domain sweep is standard
IntuiLink PC connectivity software	Connects to Microsoft® Word and Excel	The PC-based EXA requires no additional software to connect to Microsoft applications

### Step 3. Choose frequency reference

Description	ESA-E spectrum analyzer	EXA signal analyzer
Frequency reference (standard aging rate)	$\pm 2 \times 10^{-6}$ / year	$\pm 1 \times 10^{-6}$ / year
High-stability frequency reference (reduces frequency drift resulting in more accurate measurements; recommended option)	Option 1D5 Aging rate: $\pm 1 \times 10^{-7}$ / year	N9010A-PFR Aging rate: $\pm 1 \times 10^{-7}$ / year

1. The E4402B has three expansion slots for additional options; the E4404/5/7B have two expansion slots
2. Requires one expansion slot
3. Not compatible with Options 304 or 106

## ESA-E Standard Express Spectrum Analyzer (STD/STG) – continued

### Step 4. Add a preamplifier (preamplifiers are not standard)

Description	ESA-E spectrum analyzer	EXA signal analyzer
Preamplifier	Option 1DS 1 MHz to 3 GHz	N9010A-P03 100 kHz to 3.6 GHz

### Step 5. Add extra options<sup>1</sup>

Description	ESA-E spectrum analyzer	EXA signal analyzer
Narrow resolution bandwidths (recommended option)	Option 1DR	Standard
Time-gated spectrum analysis	Options 1D6	Standard
Performance bundle	Option B75 <sup>2</sup>	For equivalency, order N9010A-PFR
Replace GPIB with serial port	Option 1AX <sup>3,4</sup>	Serial port unavailable; USB comes standard
50 $\Omega$ tracking generator	Option 1DN, 9 kHz to 3 GHz	Not available

### Step 6. Choose measurement software

Description	ESA-E spectrum analyzer	EXA signal analyzer
Phase noise measurement	Option 226 <sup>1</sup>	N9068A
Noise figure measurement	Option 219 <sup>5,6</sup>	N9069A
Cable fault location measurement	Option 225 <sup>7</sup>	Not available
Cable TV field service and analog broadcast measurement	Option 227	Not available
Benchlink Web remote software	Option 230 <sup>8</sup>	Remote desktop come standard with the PC-based EXA
89601A vector signal analysis (VSA) software	89601A – runs on external PC	89601A – runs internal to the instrument
8566/68 programming code compatibility	Option 266 <sup>9</sup>	Not available
8590 Series programming code compatibility	Option 290 <sup>9</sup>	Not available
856xE/EC programming code compatibility	Not available	N9061A

### Future upgrades for the ESA-E standard express spectrum analyzer (STD/SG)

#### Available future expansion slots

E4402B – Three additional expansion slots  
E4404/5/7B – Two additional expansion slots

1. If more than two ESA-E options are ordered, memory size may limit the number of options that can be loaded at any one time; for detailed information about memory size limitations, please see the Web site: <http://sa.tm.agilent.com/ESA/memory>
2. Includes Options 1D5, 1DR and 1DS
3. Requires one expansion slot
4. Not compatible with Option A4H
5. See *ESA Noise Figure Measurement Personality Technical Overview*, literature number 5989-0215EN, for recommended options
6. Requires one expansion slot
7. Requires Option 1DN; not compatible with Option BAH; recommended accessory Option B7K
8. Requires Option A4H
9. Free download on the Web, no license required: <http://www.agilent.com/find/esa>

## ESA-E Communications Test Express Spectrum Analyzer (COM)

### Step 1. Select your frequency range

Description	ESA-E model number <sup>1</sup>	EXA option number
Frequency range, 9 kHz to 3.0 GHz	E4402B E4402B-COM	N9010A-503 EXA Option 503 maximum frequency is 3.6 GHz
Frequency range, 9 kHz to 6.7 GHz	E4404B E4404B-COM	N9010A-507 EXA Option 507 maximum frequency range is 7.0 GHz
Frequency range, 9 kHz to 13.2 GHz	E4405B E4405B-COM	N9010A-513 EXA Option 513 maximum frequency range is 13.6 GHz
Frequency range, 9 kHz to 26.5 GHz	E4407B E4407B-COM	N9010A-526

### Step 2. Included ESA-E options at no additional charge

Description	ESA-E spectrum analyzer	EXA signal analyzer
GPIB connection	Option A4H <sup>2</sup>	Standard on all EXA signal analyzers; in addition, the EXA offers seven USB ports and LAN connectivity standard
High-stability frequency reference (reduces frequency drift resulting in more accurate measurements; recommended option)	Option 1D5 Aging rate: $\pm 1 \times 10^{-7}$ / year	N9010A-PFR Aging rate: $\pm 1 \times 10^{-7}$ / year
Narrow resolution bandwidths (recommended option)	Option 1DR	Standard
ESA to 89601A VSA software link	Option 231 <sup>3, 6</sup>	Standard
FM demodulation/ deviation	Option BAA <sup>2, 3, 4</sup>	N9063A
Digital demodulation hardware	Option B7D/B7E <sup>5</sup>	Standard
IntuiLink PC connectivity software	Connects to Microsoft® Word and Excel	The PC-based EXA requires no additional software to connect to Microsoft applications

### Step 3. Add a preamplifier (preamplifiers are not standard)

Description	ESA-E spectrum analyzer	EXA signal analyzer
Preamplifier	Option 1DS 1 MHz to 3 GHz	N9010A-P03 100 kHz to 3.6 GHz

### Step 4. Add additional options

Description	ESA-E spectrum analyzer	EXA signal analyzer
Replace GPIB with serial port	Option 1AX <sup>2, 7</sup>	Serial port unavailable; USB is standard
Time-gated spectrum analysis	Options 1D6	Standard

1. The E4402B has two expansion slots for additional hardware options; the E4404/05/07B has one expansion slot
2. Requires one expansion slot
3. Requires Options B7D/B7E, A4H, and 1D5
4. Not compatible with Option 304 or 106
5. Occupies two expansion slots
6. If more than two or three ESA-E options are ordered, memory size may limit the number of options that can be loaded at any one time; for detailed information about memory size limitations, please see the Web site: <http://sa.tm.agilent.com/ESA/memory>
7. Not compatible with Option A4H



## ESA-E Communications Test Express Spectrum Analyzer (COM) – continued

### Step 5. Choose measurement software<sup>1</sup>

Description	ESA-E spectrum analyzer	EXA signal analyzer
Phase noise measurement	Option 226	N9068A
Noise figure measurement	Option 219 <sup>2</sup>	N9069A
GSM/GPRS measurement	Option BAH <sup>3,4</sup>	N9071A
EDGE upgrade to Option BAH	Option 252 <sup>5</sup>	N9071A
Cable TV field service and analog broadcast measurement	Option 227	Not available
Modulation analysis measurement	Option 229 <sup>6</sup>	89601X
89601A vector signal analysis (VSA) software	89601A – runs on external PC	89601A – runs internal to the instrument
8566/68 programming code compatibility	Option 266 <sup>7</sup>	Not available
8590 Series programming code compatibility	Option 290 <sup>7</sup>	Not available
cdmaOne measurement	Option BAC <sup>8</sup>	Not available

### Future upgrades for the ESA-E standard express spectrum analyzer (STD/SG)

#### Available future expansion slots

E4402B – Three additional expansion slots  
 E4404/5/7B – Two additional expansion slots

1. If more than two or three ESA-E options are ordered, memory size may limit the number of options that can be loaded at any one time; for detailed information about memory size limitations, please see the Web site: <http://sa.tm.agilent.com/ESA/memory>
2. See *ESA Noise Figure Measurement Personality Technical Overview*, literature number 5989-0215EN, for recommended options
3. Requires Option B7D/B7E
4. Requires Options 1D5 and 1D6; includes capability of Option 225
5. Requires Option BAH
6. Requires Options B7D/B7E, A4H, and 1D5; includes capability of Option 231
7. Free download on the Web, no license required: <http://www.agilent.com/find/esa>
8. Requires Options B7D/B7E and 1D5

## Express Analyzer and Bundle Equivalent Options

The table below shows equivalent options in each bundle offered for ESA-E spectrum analyzers.

ESA-E express option or bundle	ESA-E equivalent option(s)	Additional information
STD- Standard analyzer	AYX, BAA	
STG- Standard analyzer with tracking generator	AYX, BAA, 1DN	
COM- Communication test analyzer	B7D/B7E, 1D5, 1DR, BAA, 231	
B75- Performance bundle	1DR, 1DS, 1D5	Only available with express analyzer STD or STG
304- Bluetooth® premium bundle	228,106, B7D/B7E, 1DS, 1D5	Options 106 and 228 are not available outside the option bundle 304

## ESA-E Accessory, Calibration, and Warranty Options

### Step 6. Select accessories and calibration options

Description	ESA-E spectrum analyzer option	ESA-E notes	ESA-E part number	EXA signal analyzer option
12 VDC power cable	A5D	DC power connection available on every ESA	E4401-60066	Not available
Hard transit case	AXT		E4401-60101	N9010A-HTC
Gray soft carrying/operation case	AYT		E4401-60117	Not available
Yellow soft carrying/operation case	AYU		E4401-60118	Not available
Cable fault measurement kit (50 Ω)	B7K	Requires Option 1DN or STG and Option 225 or BAH		Not available
Gray backpack carrying case	042		9300-2465	Not available
Yellow backpack carrying case	044		9300-2470	Not available
Rack mount kit with handles	1CP	This kit is designed to fit into Agilent racks only; for non-Agilent racks, additional end brackets are required and are available by ordering part number 1494-0061	E4401-60057	N9010A-1CP
50 to 75 Ω minimum loss pad	1D7		0955-1020	N9010A-MLP
Rechargeable snap-on battery and charger	E1779B	Order as separate model number, not option number		Not available
Front panel cover	UK9		E4401-60193	Standard
Benchlink spectrum analyzer, PC software	B70	Also orderable as E4444A; requires Option A4H or 1AX		Remote desktop is a standard feature on EXA
Benchlink Web remote control software	230	Requires Option A4H		Remote desktop is a standard feature on EXA
IntuiLink software (shipped with every instrument)	***	Available on Web site for download		Remote desktop is a standard feature on EXA
Harmonic mixer series (26.5, 40, 50, 60, 75, 110 GHz)	11970	For use in E4407B Option AYZ		
Preselected millimeter mixer series (40, 50, 60, 75 GHz)	11974	For use in E4407B Option AYZ		
Low noise amplifier to 1 GHz	11909A			
Firmware upgrade	UE2	Firmware updates also available on Web site for free download <a href="http://www.agilent.com/find/esa_firmware/">http://www.agilent.com/find/esa_firmware/</a>		See <a href="http://www.agilent.com/find/exa">http://www.agilent.com/find/exa</a>
Add extra manual set	OB1	Available for Web download		Available for Web download
Commercial calibration certificate with test data	UK6			N9010A-UK6
Delete manual set (retains CD-ROM version)	OBO			
Service documentation, component level CLIP	OBV	Component level information package		
Service documentation, assembly level	OBW	Performance verification and adjustment software included		N9010-90002

For more information visit [www.agilent.com/find/accessories](http://www.agilent.com/find/accessories)

### Step 7. Choose warranty length

Description	ESA-E spectrum analyzer	EXA signal analyzer
1-year return-to-Agilent warranty and service	Standard (R-51B-001-C)	Standard (R-51B-001-C)
3-year return-to-Agilent warranty and service	R-51B-001-3C Default configuration option	Recommended upgrade

# ESA-E Upgrade Options

## Add additional options or upgrade your existing ESA-E spectrum analyzer

### Available models:

E4401BU (9 kHz to 1.5 GHz)	Customer upgradable	Customer upgradable w/test	Self-maintainers with Option 0BW & N7811A software <sup>4</sup>	Return to service center	Return to factory
E4402BU (30 Hz to 3.0 GHz)					
E4404BU (30 Hz to 6.7 GHz)					
E4405BU (30 Hz to 13.2 GHz)					
E4407BU (30 Hz to 26.5 GHz)					
<b>Ordering instructions</b>					
To upgrade an existing ESA-E Series spectrum analyzer, order the corresponding model number followed by a 'U' and the desired option number. (E440xBU-xxx)	For more information see: <a href="http://www.agilent.com/find/esa-e_upgrades/">http://www.agilent.com/find/esa-e_upgrades/</a>				

### Hardware capabilities and performance

Replace GPIB connection (A4H) with serial port	1AX	Not compatible with Option A4H; occupies one expansion slot		X		X
GPIB connection	A4H	Not compatible with Option 1AX; occupies one expansion slot		X		X
Wide offset phase noise improvement and ACPR dynamic range extension	120	Occupies one expansion slot		X		X
Time-gated spectrum analysis	1D6			X		X
50 Ω tracking generator (9 kHz to 3.0 GHz)	1DN	Operates to 1.5 GHz on E4401B		X		X
Narrow resolution BW	1DR			X		X
TV trigger and picture on screen	B7B	Requires BAA; not compatible with Option 060		X		X
Cable fault location accessory kit (50 Ω)	B7K	Requires Option 1DN and Option 225 or BAH	X			
FM demodulation/deviation	BAA	Not compatible with Options 304, or 106; occupies one expansion slot		X		X
Fast time domain sweep; IF, sweep, and video output ports	AYX	Not compatible with Options B7D, 304; occupies one expansion slot. Includes capability of Option A4J		X		X
Low emissions shielding	060	Not compatible with B7B		X		X
Preamplifier built-in for enhanced sensitivity	1DS	Operates to 3 GHz			X	X
100 Hz (30 Hz usable) frequency range extension	UKB	Requires Option 1DR			X	X
Digital demodulation hardware	B7D/ B7E	Requires Option 1D5; not compatible with Option AYX; occupies two expansion slots, must be ordered jointly			X	X
APC 3.5 mm input connector	BAB	Available on the E4407B only			X	X
Bluetooth FSK demodulator	106	Requires Options B7D, 228; occupies one expansion slot		X		X
External mixing	AYZ	Available on E4407B only			X	X
EMI detectors quasi-peak and FM demodulation	AYQ	Occupies one expansion slot; requires Option 1DR		X		X
70 MHz IF out	H70	Occupies one expansion slot		X		X
Memory extension to 10 MB X	B72	Included on all new instruments starting with SN US4144 or MY4144; required for firmware version A.08.00 or higher	X			X
High stability frequency reference	1D5	E4401B X X			X	X
		E4402B/04B/05B/07B (SN prefix before 4421) <sup>2</sup>				X
		SN prefixes US4421, MY4421, SG4421 or later <sup>3</sup>			X	X
IF sweep, video output ports	A4J	Not compatible with AYX; occupies one expansion slot		X		X

### Applications and firmware

Noise figure measurement personality and hardware	219 <sup>1</sup>	See Option 219 Technical Overview for recommended options		X		X
Cable fault location measurement personality	225 <sup>1</sup>	Requires Option 1DN; recommended accessory Option B7K; firmware available on Web, requires license key	X			
Phase noise measurement personality	226 <sup>1</sup>	Firmware available on Web, requires license key	X			
Cable TV service and installation personality	227 <sup>1</sup>	Firmware available on Web, requires license key	X			
Bluetooth measurement personality	228 <sup>1</sup>	Requires Option 106, AYX requires Option 106 for full functionality	X			
Modulation analysis personality	229 <sup>1</sup>	Requires Options B7D/B7E, 1D5; includes capability of Option 231; firmware available on Web, requires license key	X			
ESA to 89601A vector signal analysis software link utility	231 <sup>1</sup>	Requires Options B7D/B7E, A4H, 1D5; Option 229 included capability of Option 231; free download from Web; <a href="http://www.agilent.com/find/esa">www.agilent.com/find/esa</a>	X			
EDGE upgrade on GSM	252 <sup>1</sup>	Requires Options BAH, B7D/B7E, A4H, 1D5; requires Option 1DN for cable fault test	X			
HP 8566/68 programming code compatibility	266 <sup>1</sup>	Free download from Web; <a href="http://www.agilent.com/find/esa">www.agilent.com/find/esa</a>	X			
8590 Series programming code compatibility	290 <sup>1</sup>	Free download from Web; <a href="http://www.agilent.com/find/esa">www.agilent.com/find/esa</a>	X			
GSM/GPRS measurement personality	BAH <sup>1</sup>	Requires Options 1D6 firmware available on Web, requires license key	X			
cdmaOne measurement personality	BAC <sup>1</sup>	Firmware available on Web, requires license key				
FM deviation personality enhancement	J36 <sup>1</sup>	Requires Option BAA	X			

1. If more than two or three measurement personalities are ordered, memory size limitations may limit the number that may be loaded into the ESA at any one time. For detailed information about memory size limits, please see the Web site: <http://sa.tm.agilent.com/ESA/memory/>
2. For serial number prefixes less than US4421, MY4421, or SG4421, order E440xBK-1D5
3. For serial number prefixes US4421, MY4421, or SG4421 and later, order E440xBL-1D5
4. Self-maintainers are customers who service and calibrate their own instruments. Information about the N7811A software can be found at: <http://calsw.tm.agilent.com/>

## Related Literature

- Agilent ESA-E Series Spectrum Analyzer, Configuration Guide*, literature number 5989-9953EN
- Modulation Analysis Measurement Personality, Product Overview*, literature number 5988-2116EN
- Bluetooth RF Measurement Solution, Product Overview*, literature number 5980-2786EN
- Cable Fault Location Measurement Personality, Product Overview*, literature number 5980-1915E
- Cable TV Service and Installation Analyzer, Product Overview*, literature number 5980-0845E
- cdmaOne Measurement Solutions for ESA-E Series Spectrum Analyzers, Product Overview*, literature number 5968-6869E
- 8560-EC Series, Brochure*, literature number 5968-9571E
- 8560-EL Series, Technical Specifications*, literature number 5966-1496E
- 8560-EC Series, Technical Specifications*, literature number 5968-8156E
- ESA BenchLink Spectrum Analyzer Software, Product Overview*, literature number 5966-0676E
- BenchLink Web Remote Control Software, Product Overview*, literature number 5988-2610EN
- ESA Snap-On Battery Pack, Flyer*, literature number 5966-1851E
- ESA-E Series Spectrum Analyzer, Brochure*, literature number 5968-3278E
- ESA-E Series Self-Guided Demo, Product Note*, literature number 5968-3658E
- ESA-E Series TV Transmission Quality Measurements, Product Overview*, literature number 5968-6874E
- ESA-E Series Measuring Signals Above 26.5 GHz, Product Overview*, literature number 5968-6873E
- Select the Right Spectrum Analyzer for Your Needs, Selection Guide*, literature number 5968-3413E
- GSM Measurement Solutions for ESA-E Series Spectrum Analyzers, Product Overview*, literature number 5968-6871E
- Performance Verification and Adjustment Software*, (See Option OBW)
- Phase Noise Measurement Personality Product, Product Overview*, literature number 5988-4348E



### Agilent Email Updates

[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)  
Get the latest information on the products and applications you select.

## Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements. For information regarding self maintenance of this product, please contact your Agilent office.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance, onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to:

[www.agilent.com/find/removealldoubt](http://www.agilent.com/find/removealldoubt)

*Microsoft is a U.S. registered trademark of Microsoft Corporation.*

*Bluetooth and the Bluetooth logos are trademarks owned by Bluetooth SIG, Inc., U.S.A. and licensed to Agilent Technologies, Inc.*

## Agilent Channel Partners

[www.agilent.com/find/channelpartners](http://www.agilent.com/find/channelpartners)  
Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

### Americas

Canada	(877) 894-4414
Latin America	305 269 7500
United States	(800) 829-4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Thailand	1 800 226 008

### Europe & Middle East

Austria	43 (0) 1 360 277 1571
Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
Switzerland	0800 80 53 53
United Kingdom	44 (0) 118 9276201

Other European Countries:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

Revised: October 1, 2009

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2010  
Printed in USA, June 2, 2010  
5989-9953EN



**Agilent Technologies**